

## EcoStor2™ SC Solar Indirect System Single Coil Gas Backup Models



Photo is of  
**S-DW2-65T6FBN**

### FEATURING:



### 6-Year Limited Tank Warranties / 6-Year Limited Warranty on Component Parts.

For more information on warranty, please visit [www.bradfordwhite.com](http://www.bradfordwhite.com)

For products installed in USA, Canada and Puerto Rico. Some states do not allow limitations on warranties. See complete copy of the warranty included with the heater.

#### The EcoStor2™ Single Coil Defender Safety System® Models feature:

- **Backup Low NOx Burner**—To activate burner, a thermistor temperature sensor is located in the upper portion of the tank to promote greater solar operation efficiency.
- **Internal Double Wall Heat Exchanger**—1½" O.D. glass coated (Vitraglas®) steel coil ensures separation of potable water and heating fluid.
  - 3/4" NPT Solar Collector Supply and Return Connections.
- **Sensor Wires for Solar Thermistor Connections**—Twisted wires are provided under the Upper and Lower covers (Thermistors and Solar Controller are not provided).
- **Integrated Mixing Device**—Features an accurate, easy to use hand wheel for adjusting mixed water temperature, a pre-piped stainless steel flexible connector for quick installation as well as optional water connections (1/2" NPT recirculation inlet, 1/2" NPT hot water outlet, 1/4" NPT cold water outlet). This required system is easily installed and ensures a comfortable outlet temperature while providing a steady flow of hot water.
- **Honeywell Self Diagnostic Gas Control**—Intelligent gas control with proven millivolt powered technology and built-in piezo igniter. A standard, off the shelf thermopile converts heat energy from the pilot flame into electrical energy to operate the gas valve and microprocessor. No need for external electricity.
  - **Advanced Temperature Control System**—Microprocessor constantly monitors and controls burner operation to maintain accurate water temperature levels.
  - **Intelligent Diagnostics**—An exclusive green LED light prompts the installer during start-up and provides ten different diagnostic codes to assist in troubleshooting.
  - **Pilot On Indication**—Flashing green LED provides positive indication that pilot is on.
- **Defender Safety System® (S-DW2-504 & S-DW2-65T only).**
  - **Advanced ScreenLok® Technology Flame Arrestor Design**—Flame arrestor is designed to prevent ignition of flammable vapor outside of the water heater.
  - **Resettable Thermal Switch**—Proven and reliable bimetallic switch prevents burner and pilot operation in case of ongoing flammable vapor burn inside of the combustion chamber or restricted air flow.
  - **Maintenance Free**—No regular cleaning of air inlet openings or flame arrestor is required under normal conditions.
  - **Sight Window**—Offers a view into the combustion chamber to observe the operation of the pilot and burner.
- **Factory Installed Hydrojet® Total Performance System**—Cold water inlet sediment reducing device helps prevent sediment build up in tank and increases first hour delivery of hot water while minimizing temperature build up in tank.
- **Vitraglas® Lining**—Bradford White tanks are lined with a exclusively engineered enamel formula that provides superior protection from the highly corrosive effects of hot water. This formula (Vitraglas®) is fused to the steel surface by firing at a temperature of over 1600°F.
- **2" Non-CFC Foam Insulation**—Covers the sides and top of tank, reducing the amount of heat loss. This results in less energy consumption, improved operation efficiencies and jacket rigidity.
- **Water Connections**—3/4" NPT factory installed true dielectric fittings.
- **Two Protective Anode Rods.**
- **T&P Relief Valve**—Included.
- **Brass Drain Valve**—Tamper proof design.

# EcoStor2™ Indirect Water Heater System

## Single Coil Gas Backup Models

NATURAL GAS AND LIQUID PROPANE GAS

Meet or exceed ASHRAE 90.1b (current standard)  
80% Recovery Efficiency


Model Number	Capacity		Recovery at 90°F Rise*				A Floor to Flue Conn.	B Jacket Dia.	C Vent Size	D Floor to T&P Conn.	E Floor to Gas Conn.	F Floor to Top of Heater	G Floor to Water Conn.	H Floor to Solar Collector Supply in.	J Floor to Solar Collector Return in.	K Depth	Approx. Shipping Weight		
	U.S. Imp. Gal.	Gal.	Nat. BTU/Hr. Input	LP BTU/Hr. Input	Nat. U.S. Imp. GPH	LP U.S. Imp. GPH	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	lbs.		
S-DW2-504T6FBN	45	38	65,000	61,000	69	57	65	54	59 1/4	22	4	50	11 3/8	56	60	32 1/4	10 1/8	26	223
S-DW2-65T6FBN	60	50	65,000	63,000	69	57	67	56	63	24	4	53 1/2	11 3/8	59 1/2	63 1/4	32 1/4	10 1/8	28	264
S-DW2-75S6BN	70	58	76,000	76,000	82	68	82	68	62 3/8	26	4	52	14 3/8	59	62 3/4	34 5/8	12 1/2	30 3/8	306

Model Number	Capacity		Recovery at 50°C Rise*				A Floor to Flue Conn.	B Jacket Dia.	C Vent Size	D Floor to T&P Conn.	E Floor to Gas Conn.	F Floor to Top of Heater	G Floor to Water Conn.	H Floor to Solar Collector Supply mm.	J Floor to Solar Collector Return mm.	K Depth	Approx. Shipping Weight
	Liters	Liters	Nat. kW Input	LP kW Input	Nat. Liters/Hour	LP Liters/Hour	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	kg.
S-DW2-504T6FBN	170	143	19.1	17.9	261	246	1505	559	102	1270	289	1422	1456	819	257	660	101
S-DW2-65T6FBN	227	191	19.1	18.5	261	253	1600	610	102	1359	289	1511	1538	819	257	711	120
S-DW2-75S6BN	265	223	22.3	22.3	310	310	1584	660	102	1321	365	1499	1526	879	318	772	139

Propane models feature a Titanium Stainless Steel propane burner. For Propane (LP) models change suffix "BN" to "SX".

\*Based on manufacturers rated recovery efficiency.

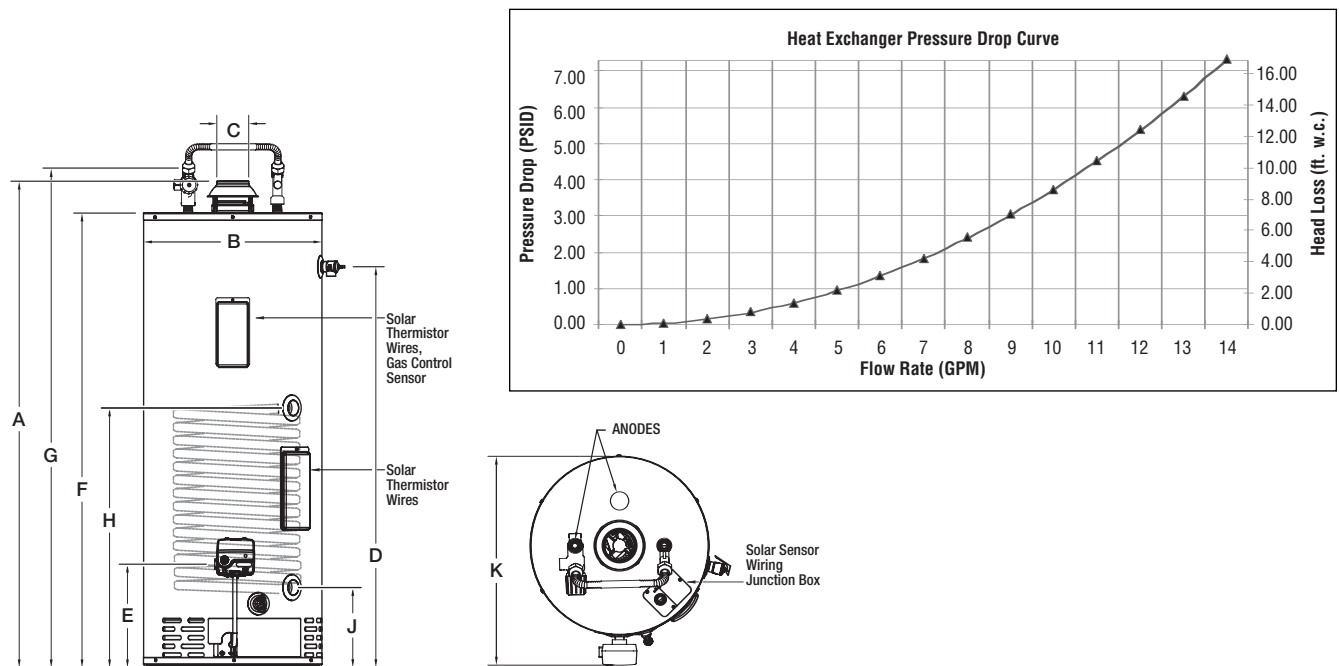

### General

All gas water heaters are certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa). All potable water and electrical connections are 3/4" NPT (19mm) on 11" (279mm) centers. All models design certified by CSA International (formerly AGA/CGA), ANSI Z-21.10.1 and 10.3 and peak performance rated.

**Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.**

**Suitable for Water (Potable) Heating and Space Heating.**

Toxic chemicals, such as those used for boiler treatment, shall NEVER be introduced into the potable side of this system. The potable side may NEVER be connected to any existing heating system or component(s) previously used with a non-potable water heating appliance.



Ambler, PA

For U.S. and Canada field service, contact your professional installer or local Bradford White sales representative.

Sales 800-523-2931 • Fax 215-641-1670 / Technical Support 800-334-3393 • Fax 269-795-1089 • Warranty 800-531-2111 • Fax 269-795-1089

International: Telephone 215-641-9400 • Telefax 215-641-9750 / [www.bradfordwhite.com](http://www.bradfordwhite.com)

**BRADFORD WHITE-CANADA** INC. Sales / Technical Support 866-690-0961 / 905-238-0100 • Fax 905-238-0105 / [www.bradfordwhite.com](http://www.bradfordwhite.com)

**Built to be the Best™**

©2010, Bradford White Corporation. All rights reserved.